

# VEGATOR 112

## Double channel controller for level detection for NAMUR sensors



### Application area

The VEGATOR 112 is a controller for point level detection with the vibrating level switches VEGASWING, VEGAVIB and VEGAWAVE with electronics version according to NAMUR (IEC 60947-5-6). Simple control functions can be realised with this combination. Typical applications are monitoring functions such as overflow or dry run protection.

### Your benefit

- Comprehensive monitoring detects short-circuit and measuring line break as well as malfunctions in the sensor
- Simple and convenient line monitoring via test keys for both channels (also for SIL and WHG)
- Easy installation thanks to carrier rail mounting and detachable, coded terminals

### Function

The VEGATOR 112 is a double channel instrument and is mainly used for point level detection, for example in conjunction with vibrating level switches. It transmits binary signals from the field. The signals can also come from a hazardous area. Level switches according to DIN EN 60947-5-6 (NAMUR) can be connected to it. The signal circuit is monitored for line break and shortcircuit. An operating relay (output) per channel is available as limit value signaller for control tasks.

### Approvals

Worldwide approvals are available for VEGA instruments, e.g. for use in hazardous areas, on ships or in hygienic applications.

The technical data in the respective safety instructions are valid for approved instruments (e.g. with Ex approval). In some cases, these data can differ from the data listed herein.

You can find detailed information on the existing approvals with the appropriate product on our homepage.

### Technical data

#### General data

Series Module unit for mounting on carrier rails  
35 x 7.5 acc. to EN 50022/60715

#### Connection terminals

– Wire cross-section 0.25 mm<sup>2</sup> (AWG 23) ... 2.5 mm<sup>2</sup> (AWG 12)

#### Voltage supply

##### Operating voltage

– Nominal voltage AC 24 ... 230 V (-15 %, +10 %) 50/60 Hz  
– Nominal voltage DC 24 ... 65 V (-15 %, +10 %)

Max. power consumption 2 W (8 VA)

#### Sensor input

Quantity 2 x NAMUR

Input type Active (sensor power supply by VEGATOR 112)

Measured value transmission Analogue 1.2/2.1 mA

#### Switching threshold

– On 1.5 mA  
– Off 1.7 mA

Current limitation Through internal resistance

Terminal voltage 8.2 V DC, ± 5 %

Internal resistance 1 kΩ, ± 1 %

Detection line break ≤ 0.05 mA

Detection shortcircuit ≥ 6.8 mA

#### Relay output

Quantity 2 x operating relay

Contact Floating change-over contact (SPDT)

Switching voltage min. 10 mV DC, max. 253 V AC/50 V DC

Switching current min. 10 μA DC, max. 3 A AC, 1 A DC

Breaking capacity min. 50 mW, max. 500 VA, max. 54 W DC

Switch-on/Switch-off delay

– Basic delay 100 ms

#### Ambient conditions

Ambient temperature at the installation site of the instrument -20 ... +60 °C (-4 ... +140 °F)


#### Electrical protective measures

Protection rating IP 20

Overvoltage category (IEC 61010-1)

Pollution degree 2


## Electrical connection

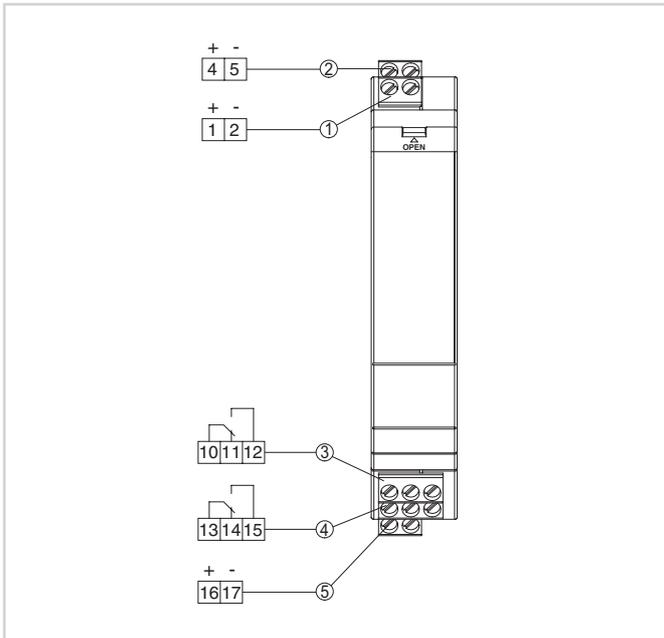

- 1 Sensor circuit, channel 1 (1.2/2.1 mA)
- 2 Sensor circuit, channel 2 (1.2/2.1 mA)
- 3 Relay output channel 1
- 4 Relay output channel 2
- 5 Voltage supply

You can find details on electrical connection in the instrument operating instructions on our homepage at [www.vega.com/downloads](http://www.vega.com/downloads).

## Dimensions

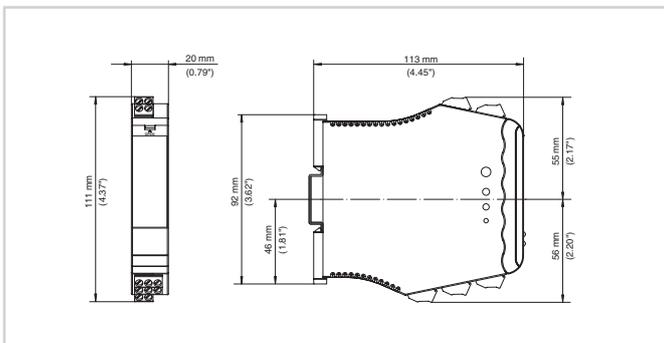

Dimensions VEGATOR 112

## Information

You can find further information on the VEGA product line on our homepage.

In the download section of our homepage you'll find operating instructions, product information, industry brochures and approval documents as well as device and adjustment software.

## Contact

You can find your personal contact person at VEGA on our homepage under "Contact".