

CAST-X Circulation Heaters

Summary Sheet



CAST ALUMINUM
Solutions

ALL CAST-X CIRCULATION HEATERS FEATURE:

- Standard CAST-X Models use Stainless Steel (316L) Flow-Tubes
- CAST-X High Temp models use Inconel 600 Flow-Tubes
- Compatible with High Pressure Applications
- UL®-Approved Heating Elements
- Perfect for Contamination-Free Applications
- Ability to Safely Heat Flammable Media

Fluid is isolated in flow-tube, never contacting heating elements

The table below shows data for standard CAST-X models and components.
Custom tube materials, finishes and configurations are also available.
See a CAS representative for details and a formal quote on all custom orders.




MODEL	POWER RANGE	MAX OPERATING TEMPERATURES	TUBE SPECS	STANDARD NO. OF TUBES	MAX PRESSURE (standard 316 SS)	ENCLOSURE OPTIONS
CAST-X 500	300 - 1500 Watts	No Enclosure: 392°F (200°C) NEMA 1 250°F (121°C) NEMA 4 250°F (121°C) NEMA 7 392°F (200°C)	OD: .250" (1/4") (6.3 mm) Wall: .035" (.89 mm)	1	5100 psi (351 bar)	No Enclosure NEMA 1 NEMA 4 NEMA 7
CAST-X 1000	190 - 3000 Watts	No Enclosure: 662°F (350°C) NEMA 1: 608°F (320°C) with thermostat: 250°F (121°C) NEMA 4: 482°F (250°C) with thermostat: 250°F (121°C)	OD: .313" (5/16") (7.9 mm) Wall: .020" (.5 mm)	1	2100 psi (144 bar)	No Enclosure NEMA 1 NEMA 4
CAST-X 2000	.5 - 6 Kw	NEMA 1: 482°F (250°C) with standoff: 662°F (350°C) with t-stat: 250°F (121°C) NEMA 4: 350°F (175°C) with standoff: 662°F (350°C) NEMA 7: 482°F (250°C)	OD: .50" (1/2") (12.7 mm) Wall: .065" (1.7 mm)	1	5100 psi (351 bar)	NEMA 1 NEMA 4 NEMA 7 Standard or Standoff Design
CAST-X 2500	.7 - 15 kW	NEMA 1: 662°F (350°C) NEMA 4: 572°F (300°C) NEMA 7: 482°F (250°C) ATEX: 482°F (250°C)	OD: .625" (5/8") (15.9 mm) Wall: .065" (1.7 mm)	2 Standard Single Tube Available	4000 psi (275 bar)	NEMA 1 NEMA 4 NEMA 7 ATEX
CAST-X 3000	.7 - 27 kW	NEMA 4: 572°F (300°C) NEMA 7 / ATEX: 482°F (250°C)	OD: .750" (3/4") (19.1 mm) Wall: .065" (1.7 mm)	2 Standard Single Tube Available	3300 psi (227 bar)	NEMA 4 NEMA 7/ATEX
CAST-X 4000	1.2 - 60.3 kW	NEMA 4: 572°F (300°C) NEMA 7 / ATEX: 662°F (350°C)	OD: 1.0" (25.4 mm) Wall: .083" (2.1 mm)	2 Standard Single Tube Available	3100 psi (213 bar)	NEMA 4 NEMA 7/ATEX
CAST-X HIGH TEMP 500	300 - 1500 Watts	1112°F (600°C)	OD: .250" (1/4") (6.3 mm) Wall: .035" (.89 mm)	1	5100 psi (351 bar)	No Enclosure NEMA 7
CAST-X HIGH TEMP 1000	190 - 3000 Watts	1112°F (600°C)	OD: .313" (5/16") (7.9 mm) Wall: .028" (.7 mm)	1	2100 psi (144 bar)	NEMA 4 NEMA 7
CAST-X HIGH TEMP 2000	.5 - 6 Kw	1112°F (600°C)	OD: .50" (1/2") (12.7 mm) Wall: .065" (1.7 mm)	1	5100 psi (351 bar)	NEMA 4 NEMA 7

NEED ASSISTANCE ?


The CAS Team is ready and available to provide assistance with engineering calculations, part numbering protocols, and general application advise. Feel free to give us a call or email. We're here to help.

Cast Aluminum Solutions
Tel: 888-367-3992 or 630-879-2696
Sales@CastAluminumSolutions.com
www.CastAluminumSolutions.com

Power Ranges for Standard CAST-X Circulation Heaters

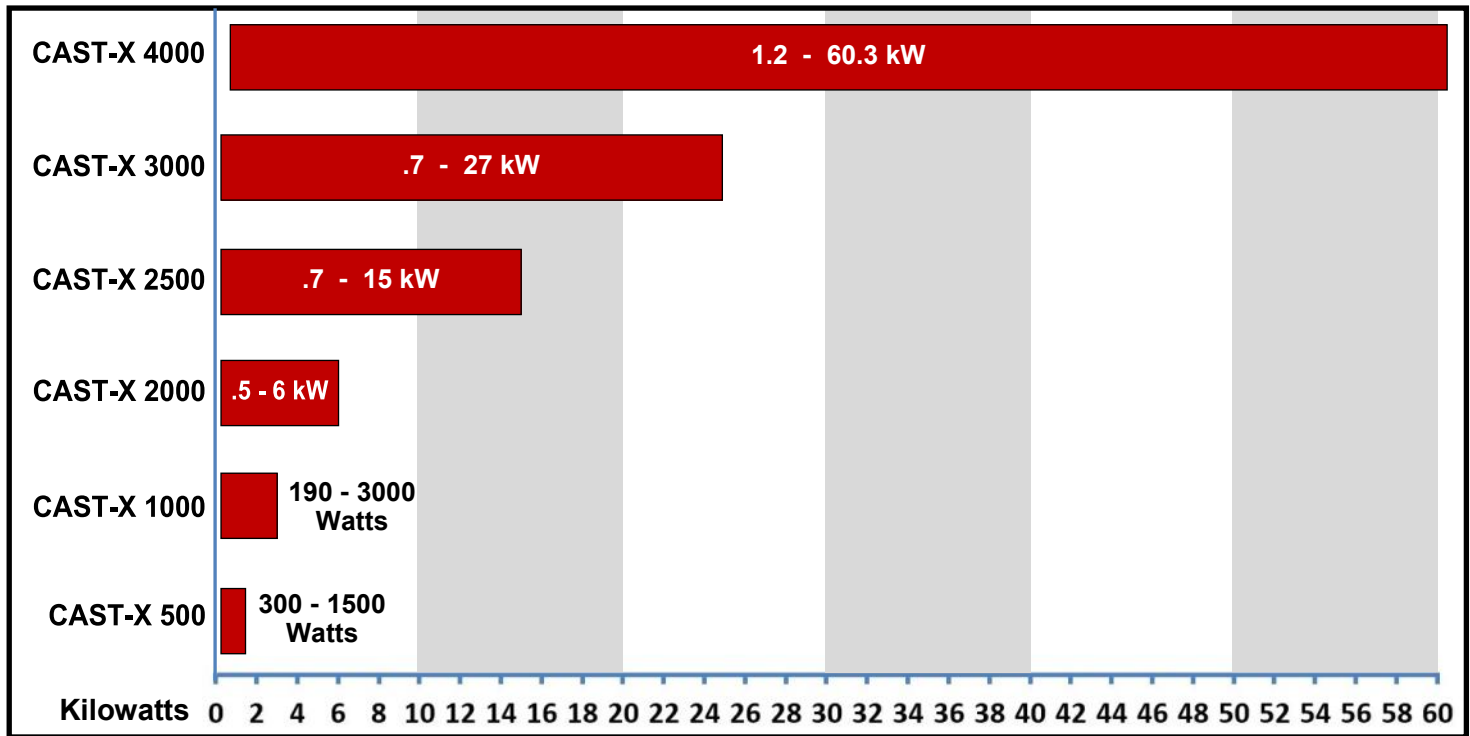

Important Features of CAST-X Circulation Heaters

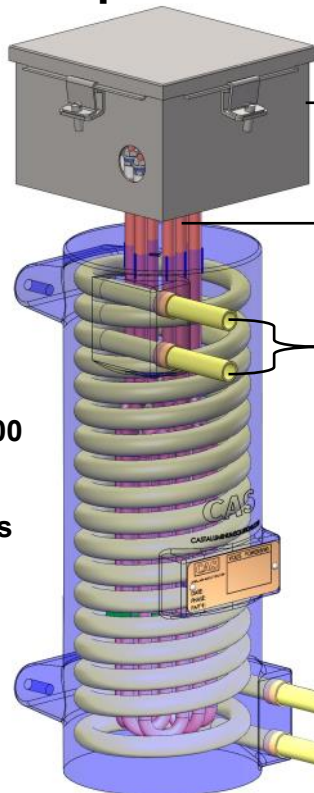

CAST-X 2500 with Dual Flow-Tubes

Power wires, high-limit switches and thermocouple connections are housed in safety-certified terminal enclosures.

CAS offers a variety of moisture-resistant, explosion-proof and general-purpose enclosures, to meet a range of requirements.

Heating elements (orange) and flow-tubes (yellow) are cast into the aluminum body: *this produces excellent heat transfer.*

Heated fluids are isolated in SST tubes, never touching the heating elements or any other components inside the heater.

Safely heat flammable gases & liquids with CAST-X Heaters. (perfect for natural gas, aerospace fuel, petrochemical heating)

This "no contact design" is also suitable for high purity processes. (perfect for food, medical, and semiconductor applications)

Standard CAST-X units have Seamless Stainless Steel (316L) flow-tubes. *These are compatible with high-pressure processes.*

Flow-tubes are "self-draining" (an important safety feature).

Single and dual-tube units are available, depending on the model.

Dual tube models can run in multiple flow formats (see below)

CAST-X 500, 1000, and 2000 Models have a Single Flow-Tube

CAST-X 2500, 3000, and 4000 Models are Available with 2 Flow-Tubes, Which Can Be Run in 3 Basic Configurations:

- **Single Tube:** Only 1 of the 2 tubes is utilized. This will not hurt the heater or the empty flow-tube.
- **Series Flow:** Media flows through Tube 1 then through Tube 2, for maximum dwell time.
- **Parallel Flow:** Media flows simultaneously in and out of Tubes 1 & 2, to maximize flow-rates.

Electrical Enclosure Types – Non Hazardous Location Environmental Rating Standards Comparison

NEMA and UL are standards writing organizations. The ratings are based on similar application descriptions and performance expectations. UL requires testing for compliance by qualified evaluators independent of the manufacturer. NEMA does not require independent testing and leaves compliance up to the manufacturer.



National Electrical Manufacturers Association
(NEMA Standard 250)



Underwriters Laboratories, Inc.
(UL50 and UL 508)

Enclosure Rating

Type 1	Indoor use to provide a degree of protection to personnel against access to hazardous parts and to provide a degree of protection of the equipment inside the enclosure against ingress of solid foreign objects (falling dirt).	Indoor use to provide a degree of protection to personnel against incidental contact with the enclosed equipment and to provide a degree of protection against falling dirt.
Type 2	Indoor use to provide a degree of protection to personnel against access to hazardous parts; to provide a degree of protection of the equipment inside the enclosure against ingress of solid foreign objects (falling dirt); and to provide a degree of protection with respect to harmful effects on the equipment due to the ingress of water (dripping and light splashing).	Indoor use to provide a degree of protection to personnel against incidental contact with the enclosed equipment; to provide a degree of protection against falling dirt, and to provide a degree of protection against dripping and light splashing of non-corrosive liquids.
Type 3	Indoor or outdoor use to provide a degree of protection to personnel against access to hazardous parts; to provide a degree of protection of the equipment inside the enclosure against ingress of solid foreign objects (falling dirt and windblown dust); to provide a degree of protection with respect to harmful effects on the equipment due to the ingress of water (rain, sleet, snow); and that will be undamaged by the external formation of ice on the enclosure.	Indoor or outdoor use to provide a degree of protection to personnel against incidental contact with the enclosed equipment; to provide a degree of protection against falling dirt, rain, sleet, snow, and windblown dust; and that will be undamaged by the external formation of ice on the enclosure.
Type 3R	Enclosures constructed for either indoor or outdoor use to provide a degree of protection to personnel against access to hazardous parts; to provide a degree of protection of the equipment inside the enclosure against ingress of solid foreign objects (falling dirt); to provide a degree of protection with respect to harmful effects on the equipment due to the ingress of water (rain, sleet, snow); and that will be undamaged by the external formation of ice on the enclosure.	Indoor or outdoor use to provide a degree of protection to personnel against incidental contact with the enclosed equipment; to provide a degree of protection against falling dirt, rain, sleet, and snow; and that will be undamaged by the external formation of ice on the enclosure.
Type 3S	Indoor or outdoor use to provide a degree of protection to personnel against access to hazardous parts; to provide a degree of protection of the equipment inside the enclosure against ingress of solid foreign objects (falling dirt and windblown dust); to provide a degree of protection with respect to harmful effects on the equipment due to the ingress of water (rain, sleet, snow); and for which the external mechanism(s) remain operable when ice laden.	Indoor or outdoor use to provide a degree of protection to personnel against incidental contact with the enclosed equipment; to provide a degree of protection against falling dirt, rain, sleet, snow, and windblown dust; and in which the external mechanisms remain operable when ice laden.
Type 3X	Indoor or outdoor use to provide a degree of protection to personnel against access to hazardous parts; to provide a degree of protection of the equipment inside the enclosure against ingress of solid foreign objects (falling dirt and windblown dust); to provide a degree of protection with respect to harmful effects on the equipment due to the ingress of water (rain, sleet, snow); that provides an additional level of protection against corrosion and that will be undamaged by the external formation of ice on the enclosure.	
Type 3RX	Indoor or outdoor use to provide a degree of protection to personnel against access to hazardous parts; to provide a degree of protection of the equipment inside the enclosure against ingress of solid foreign objects (falling dirt); to provide a degree of protection with respect to harmful effects on the equipment due to the ingress of water (rain, sleet, snow); that will be undamaged by the external formation of ice on the enclosure that provides an additional level of protection against corrosion; and that will be undamaged by the external formation of ice on the enclosure.	
Type 3SX	Indoor or outdoor use to provide a degree of protection to personnel against access to hazardous parts; to provide a degree of protection of the equipment inside the enclosure against ingress of solid foreign objects (falling dirt and windblown dust); to provide a degree of protection with respect to harmful effects on the equipment due to the ingress of water (rain, sleet, snow); that provides an additional level of protection against corrosion; and for which the external mechanism(s) remain operable when ice laden.	
Type 4	Indoor or outdoor use to provide a degree of protection to personnel against access to hazardous parts; to provide a degree of protection of the equipment inside the enclosure against ingress of solid foreign objects (falling dirt and windblown dust); to provide a degree of protection with respect to harmful effects on the equipment due to the ingress of water (rain, sleet, snow, splashing water, and hose directed water); and that will be undamaged by the external formation of ice on the enclosure.	Indoor or outdoor use to provide a degree of protection to personnel against incidental contact with the enclosed equipment; to provide a degree of protection against falling dirt, rain, sleet, snow, windblown dust, splashing water, and hose-directed water; and that will be undamaged by the external formation of ice on the enclosure.
Type 4X	Indoor or outdoor use to provide a degree of protection to personnel against access to hazardous parts; to provide a degree of protection of the equipment inside the enclosure against ingress of solid foreign objects (windblown dust); to provide a degree of protection with respect to harmful effects on the equipment due to the ingress of water (rain, sleet, snow, splashing water, and hose directed water); that provides an additional level of protection against corrosion; and that will be undamaged by the external formation of ice on the enclosure.	Indoor or outdoor use to provide a degree of protection to personnel against incidental contact with the enclosed equipment; to provide a degree of protection against falling dirt, rain, sleet, snow, windblown dust, splashing water, hose-directed water, and corrosion; and that will be undamaged by the external formation of ice on the enclosure.
Type 5	Indoor or outdoor use to provide a degree of protection to personnel against access to hazardous parts; to provide a degree of protection of the equipment inside the enclosure against ingress of solid foreign objects (falling dirt and settling airborne dust, lint, fibers, and flyings); and to provide a degree of protection with respect to harmful effects on the equipment due to the ingress of water (dripping and light splashing).	Indoor use to provide a degree of protection to personnel against incidental contact with the enclosed equipment; to provide a degree of protection against falling dirt; against settling airborne dust, lint, fibers, and flyings; and to provide a degree of protection against dripping and light splashing of non-corrosive liquids.
Type 6	Indoor or outdoor use to provide a degree of protection to personnel against access to hazardous parts; to provide a degree of protection of the equipment inside the enclosure against ingress of solid foreign objects (falling dirt); to provide a degree of protection with respect to harmful effects on the equipment due to the ingress of water (hose directed water and the entry of water during occasional temporary submersion at a limited depth); and that will be undamaged by the external formation of ice on the enclosure.	Indoor or outdoor use to provide a degree of protection to personnel against incidental contact with the enclosed equipment; to provide a degree of protection against falling dirt, rain, sleet, snow, hose-directed water and the entry of water during occasional temporary submersion at a limited depth; and that will be undamaged by the external formation of ice on the enclosure.
Type 6P	Indoor or outdoor use to provide a degree of protection to personnel against access to hazardous parts; to provide a degree of protection of the equipment inside the enclosure against ingress of solid foreign objects (falling dirt); to provide a degree of protection with respect to harmful effects on the equipment due to the ingress of water (hose directed water and the entry of water during prolonged submersion at a limited depth); that provides an additional level of protection against corrosion and that will be undamaged by the external formation of ice on the enclosure.	Indoor or outdoor use to provide a degree of protection to personnel against incidental contact with the enclosed equipment; to provide a degree of protection against falling dirt, rain, sleet, snow, hose-directed water, corrosion, and the entry of water during prolonged submersion at a limited depth; and that will be undamaged by the external formation of ice on the enclosure.
Type 7	Designed to contain an internal explosion without causing an external hazard.	Indoor use in hazardous (Classified) locations classified as Class I, Division 1, Groups A, B, C, or D as defined in NFPA 70.
Type 8	Designed to prevent combustion through the use of oil-immersed equipment.	Indoor or outdoor use in hazardous (Classified) locations classified as Class I, Division 1, Groups A, B, C, and D as defined in NFPA 70.
Type 9	Designed to prevent the ignition of combustible dust.	Indoor use in hazardous (Classified) locations classified as Class II, Division 1, Groups E, F, or G as defined in NFPA 70.
Type 10	Designed to contain an internal explosion without causing an external hazard.	Meet the requirements of the Mine Safety and Health Administration, 30 CFR, Part 18.
Type 12	Constructed (without knockouts) for indoor use to provide a degree of protection to personnel against access to hazardous parts; to provide a degree of protection of the equipment inside the enclosure against ingress of solid foreign objects (falling dirt and circulating dust, lint, fibers, and flyings); and to provide a degree of protection with respect to harmful effects on the equipment due to the ingress of water (dripping and light splashing).	Constructed (without knockouts) for indoor use to provide a degree of protection to personnel against incidental contact with the enclosed equipment; to provide a degree of protection against falling dirt; against circulating dust, lint, fibers, and flyings; against dripping and light splashing of non-corrosive liquids; and against light splashing and consequent seepage of oil and non-corrosive coolants.
Type 12K	Constructed (with knockouts) for indoor use to provide a degree of protection to personnel against access to hazardous parts; to provide a degree of protection of the equipment inside the enclosure against ingress of solid foreign objects (falling dirt and circulating dust, lint, fibers, and flyings); and to provide a degree of protection with respect to harmful effects on the equipment due to the ingress of water (dripping and light splashing).	Constructed (with knockouts) for indoor use to provide a degree of protection to personnel against incidental contact with the enclosed equipment; to provide a degree of protection against falling dirt; against circulating dust, lint, fibers, and flyings; against dripping and light splashing of non-corrosive liquids; and against light splashing and consequent seepage of oil and non-corrosive coolants.
Type 13	Indoor use to provide a degree of protection to personnel against access to hazardous parts; to provide a degree of protection of the equipment inside the enclosure against ingress of solid foreign objects (falling dirt and circulating dust, lint, fibers, and flyings); to provide a degree of protection with respect to harmful effects on the equipment due to the ingress of water (dripping and light splashing); and to provide a degree of protection against the spraying, splashing, and seepage of oil and non-corrosive coolants	Indoor use to provide a degree of protection to personnel against incidental contact with the enclosed equipment; to provide a degree of protection against falling dirt; against circulating dust, lint, fibers, and flyings; and against the spraying, splashing, and seepage of water, oil, and non-corrosive coolants.



Material courtesy of National Electrical Manufacturers Association and is not intended to a complete representation of NEMA electrical enclosure standards. NEMA shall not incur any obligation or liability for damages from the interpretation of this material.

Material courtesy of Underwriters Laboratories, Inc. and is not intended to a complete representation of UL electrical enclosure standards. UL shall not incur any obligation or liability for damages from the interpretation of this material.