CAST-X 500 WITH NEMA 1 and NEMA 4 ENCLOSURE (same enclosure for NEMA 1 or 4) >>>>

NEMA 4 simply has a sealant applied on the inside rim of the lid, as an extra protective measure.

- UL 508A Listed; Type 4, 6, 12, 13; File No. E61997
- CUL Listed per CSA C22.2 No. 94; Type 4, 6, 12, 13; File No. E61997
- NEMA Type 4, 6, 12, 13
- CSA, File No. 42186: Type 4, 12, 13
- IEC 60529, IP67



- UL Standard: 1203 •
- ANSI Standard: C33.27 .
- CSA Standard: C22.2 No. 30 •
- NEMA/EEMAC 3, 4 •
- NEC / CEC Certs: •
- Cl. I, Div. 1 & 2, Groups B*, C, D (Explosion-proof) Cl. II, Div. 1, Groups E, F, G (Dust-Ignition proof) -
- -
- Cl. II, Div. 2, Groups F, G (Rain-tight)
- CI. III (Wet Locations) -





This enclosure is not certified to any particular zone or group. We need to re-label the brochures as it is actually not "NEMA Certified". We need to just call it a "Dust Cap" or "General Purpose Enclosure" This is true whether the enclosure has the Thermostat or not.



- UL 50, 50E Listed; Type 4, 12, 13; File No. E27525
- cUL Listed per CSA C22.2 No. 94; Type 4, 12, 13; File No. E27525
- UL 508A Listed; Type 4, 12, 13; File No. E61997
- cUL Listed per CSA C22.2 No. 94; Type 4, 12, 13; File No. E61997
- NEMA/EEMAC Type 4, 12, 13
- CSA, File No. 42184: Type 4, 12
- IEC 60529, IP66

IF THIS ENCLOSURE HAS AN EXTERNAL T-STAT IT WILL BE 4 X 4 INCHES, LIKE BELOW (If it has a T-Stat inside, it will be 6 x 6 inches, as depicted on next page)



- UL 50, 50E Listed; Type 4, 12, 13; File No. E27525
- cUL Listed per CSA C22.2 No. 94; Type 4, 12, 13; File No. E27525
- UL 508A Listed; Type 4, 12, 13; File No. E61997
- cUL Listed per CSA C22.2 No. 94; Type 4, 12, 13; File No. E61997
- NEMA/EEMAC Type 4, 12, 13
- CSA, File No. 42184: Type 4, 12
- IEC 60529, IP66

If this enclosure has a T-Stat inside, it will be 6 x 6 inches, as below





CAST-X 2000 WITH GENERAL PURPOSE ENCLOSURE – NO TSTAT - STANDARD MOUNT >>>

This enclosure is not certified to any particular zone or group. We need to re-label the brochures as it is actually not "NEMA Certified". We just call it a "Dust Cap" or "General Purpose Enclosure" This is true whether the enclosure has the Thermostat or not.

BELOW IS "STANDARD MOUNT" POSITION....NO T-STAT



CAST-X 2000 WITH GENERAL PURPOSE ENCLOSURE – WITH TSTAT - STANDARD MOUNT >

This enclosure is not certified to any particular zone or group. We just call it a "Dust Cap" or "General Purpose Enclosure" This is true whether the enclosure has the Thermostat or not.

BELOW IS "STANDARD MOUNT" POSITION WITH T-STAT



BELOW IS "STANDOFF MOUNT" POSITION....NO T-STAT STANDOFF WOULD NOT BE ORDERED WITH A THERMOSTAT



- UL 50, 50E Listed; Type 4, 12, 13; File No. E27525
- cUL Listed per CSA C22.2 No. 94; Type 4, 12, 13; File No. E27525
- UL 508A Listed; Type 4, 12, 13; File No. E61997
- cUL Listed per CSA C22.2 No. 94; Type 4, 12, 13; File No. E61997
- NEMA/EEMAC Type 4, 12, 13
- CSA, File No. 42184: Type 4, 12
- IEC 60529, IP66

IF THIS ENCLOSURE HAS AN EXTERNAL T-STAT IT WILL BE 4 X 4 INCHES, LIKE BELOW (If it has a T-Stat inside, it will be 6 x 6 inches, as depicted on next page)



- UL 50, 50E Listed; Type 4, 12, 13; File No. E27525
- cUL Listed per CSA C22.2 No. 94; Type 4, 12, 13; File No. E27525
- UL 508A Listed; Type 4, 12, 13; File No. E61997
- cUL Listed per CSA C22.2 No. 94; Type 4, 12, 13; File No. E61997
- NEMA/EEMAC Type 4, 12, 13
- CSA, File No. 42184: Type 4, 12
- IEC 60529, IP66

If this enclosure has a T-Stat inside, it will be 6 x 6 inches, as below



CAST-X 2000 WITH WATER RESISTANT ENCLOSURE – NO T-STAT and STANDOFF MOUNT >>

- UL 50, 50E Listed; Type 4, 12, 13; File No. E27525
- cUL Listed per CSA C22.2 No. 94; Type 4, 12, 13; File No. E27525
- UL 508A Listed; Type 4, 12, 13; File No. E61997
- cUL Listed per CSA C22.2 No. 94; Type 4, 12, 13; File No. E61997
- NEMA/EEMAC Type 4, 12, 13
- CSA, File No. 42184: Type 4, 12
- IEC 60529, IP66

STANDOFF WOULD NOT BE ORDERED WITH A THERMOSTAT



CAST-X 2000 WITH EXPLOSION PROOF ENCLOSURE – NO T-STAT, STANDARD MOUNT >>

Hazardous Location Terminal Enclosure CSA, US and Canada Mark Class 1, Divs. 1 & 2, Groups A, B, C, D Class 2, Divs. 1 & 2, Groups E, F, G Class 3, Divs. 1 & 2



CAST-X 2000 WITH EXPLOSION PROOF ENCLOSURE – with T-STAT, STANDARD MOUNT >>

Hazardous Location Terminal Enclosure CSA, US and Canada Mark Class 1, Divs. 1 & 2, Groups A, B, C, D Class 2, Divs. 1 & 2, Groups E, F, G Class 3, Divs. 1 & 2



Hazardous Location Terminal Enclosure CSA, US and Canada Mark Class 1, Divs. 1 & 2, Groups A, B, C, D Class 2, Divs. 1 & 2, Groups E, F, G Class 3, Divs. 1 & 2

Enclosure is certified by CSA (Canadian Standards Association) which is very similar to NEMA, but not exact same agency.

THIS "STANDOFF MOUNT" WITH THE XP ENCLOSURE IS A CUSTOM OPTION.... BUT IS AVIALABLE TO ORDER.



CAST-X 2000 WITH EXPLOSION PROOF ATEX CERTIFIED ENCLOSURE – THIS OPTION IS NOT LISTED ON THE BROCHURE, BUT WE DO OFFER IT AS A CUSTOM OPTION WE HAVE MADE SEVERAL OF THESE FOR CUSTOMERS IN EUROPE, AS THEY LIKE THE FACT THAT THE ENCLOSURE IS ATEX AND IEC CERTIFIED. NO T-STAT ABAILABLE HERE

- ATEX Certified Explosion Proof
- UL Classified 9L44
- CSA Code LR 86146
- FM Cert: FM09ATEX0073U
- Class 1, Div. 1 & 2, Groups B, C, D
- Class 1, Zone 1 & 2, IIB + H2
- Class 2, Div. 1 & 2, Groups E, F, G, Class 3, Div. 1 & 2
- Enclosure Type 4X (Type 7, & 9 for UL)
- IEC Certified: Ex db IIC Gb, EX tb IIIC Db







CAST-X 2500 WITH GENERAL PURPOSE ENCLOSURE – NO T-STAT...... DUAL TUBE

This enclosure is not certified to any particular zone or group. We just call it a "Dust Cap" or "General Purpose Enclosure" We need to re-label the brochures as it is actually not "NEMA Certified". This is true whether the enclosure has the Thermostat or not.



CAST-X 2500 WITH GENERAL PURPOSE ENCLOSURE – NO T-STAT...... SINGLE TUBE

This enclosure is not certified to any particular zone or group. We just call it a "Dust Cap" or "General Purpose Enclosure" We need to re-label the brochures as it is actually not "NEMA Certified". This is true whether the enclosure has the Thermostat or not.



- UL 50, 50E Listed; Type 4, 12, 13; File No. E27525
- cUL Listed per CSA C22.2 No. 94; Type 4, 12, 13; File No. E27525
- UL 508A Listed; Type 4, 12, 13; File No. E61997
- cUL Listed per CSA C22.2 No. 94; Type 4, 12, 13; File No. E61997
- NEMA/EEMAC Type 4, 12, 13
- CSA, File No. 42184: Type 4, 12
- IEC 60529, IP66




- UL 50, 50E Listed; Type 4, 12, 13; File No. E27525
- cUL Listed per CSA C22.2 No. 94; Type 4, 12, 13; File No. E27525
- UL 508A Listed; Type 4, 12, 13; File No. E61997
- cUL Listed per CSA C22.2 No. 94; Type 4, 12, 13; File No. E61997
- NEMA/EEMAC Type 4, 12, 13
- CSA, File No. 42184: Type 4, 12
- IEC 60529, IP66



CAST-X 2500 WITH EXPLOSION PROOF ENCLOSURE – NO T-STAT – DUAL TUBE

Hazardous Location Terminal Enclosure CSA, US and Canada Mark Class 1, Divs. 1 & 2, Groups A, B, C, D Class 2, Divs. 1 & 2, Groups E, F, G Class 3, Divs. 1 & 2

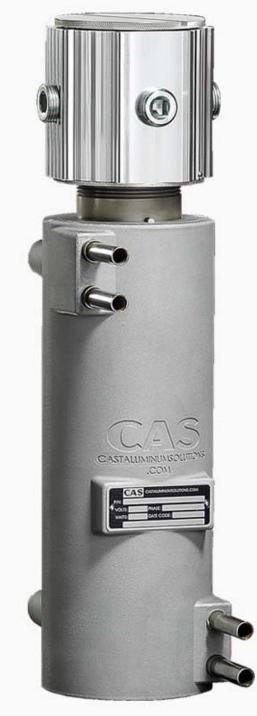

CAST-X 2500 WITH EXPLOSION PROOF ENCLOSURE – NO T-STAT – SINGLE TUBE

Hazardous Location Terminal Enclosure CSA, US and Canada Mark Class 1, Divs. 1 & 2, Groups A, B, C, D Class 2, Divs. 1 & 2, Groups E, F, G Class 3, Divs. 1 & 2



CAST-X 2500 WITH EXPLOSION PROOF ENCLOSURE – WITH T-STAT – DUAL TUBE

Hazardous Location Terminal Enclosure CSA, US and Canada Mark Class 1, Divs. 1 & 2, Groups A, B, C, D Class 2, Divs. 1 & 2, Groups E, F, G Class 3, Divs. 1 & 2



CAST-X 2500 WITH EXPLOSION PROOF ENCLOSURE – WITH T-STAT – SINGLE TUBE

Hazardous Location Terminal Enclosure CSA, US and Canada Mark Class 1, Divs. 1 & 2, Groups A, B, C, D Class 2, Divs. 1 & 2, Groups E, F, G Class 3, Divs. 1 & 2



CAST-X 2500 WITH EXPLOSION PROOF ATEX CERTIFIED ENCLOSURE – WITH OR WITHOUT T-STAT – DUAL TUBE

- ATEX Certified Explosion Proof
- UL Classified 9L44
- CSA Code LR 86146
- FM Cert: FM09ATEX0073U
- Class 1, Div. 1 & 2, Groups B, C, D
- Class 1, Zone 1 & 2, IIB + H2
- Class 2, Div. 1 & 2, Groups E, F, G, Class 3, Div. 1 & 2
- Enclosure Type 4X (Type 7, & 9 for UL)
- IEC Certified: Ex db IIC Gb, EX tb IIIC Db



CAST-X 2500 WITH EXPLOSION PROOF ATEX CERTIFIED ENCLOSURE – WITH OR WITHOUT T-STAT – SINGLE TUBE

- ATEX Certified Explosion Proof
- UL Classified 9L44
- CSA Code LR 86146
- FM Cert: FM09ATEX0073U
- Class 1, Div. 1 & 2, Groups B, C, D
- Class 1, Zone 1 & 2, IIB + H2
- Class 2, Div. 1 & 2, Groups E, F, G, Class 3, Div. 1 & 2
- Enclosure Type 4X (Type 7, & 9 for UL)
- IEC Certified: Ex db IIC Gb, EX tb IIIC Db





- UL 50, 50E Listed; Type 4, 12, 13; File No. E27525
- cUL Listed per CSA C22.2 No. 94; Type 4, 12, 13; File No. E27525
- UL 508A Listed; Type 4, 12, 13; File No. E61997
- cUL Listed per CSA C22.2 No. 94; Type 4, 12, 13; File No. E61997
- NEMA/EEMAC Type 4, 12, 13
- CSA, File No. 42184: Type 4, 12
- IEC 60529, IP66



- UL 50, 50E Listed; Type 4, 12, 13; File No. E27525
- cUL Listed per CSA C22.2 No. 94; Type 4, 12, 13; File No. E27525
- UL 508A Listed; Type 4, 12, 13; File No. E61997
- cUL Listed per CSA C22.2 No. 94; Type 4, 12, 13; File No. E61997
- NEMA/EEMAC Type 4, 12, 13
- CSA, File No. 42184: Type 4, 12
- IEC 60529, IP66



CAST-X 3000 WITH EXPLOSION PROOF ATEX CERTIFIED ENCLOSURE – DUAL TUBE

- ATEX Certified Explosion Proof
- UL Classified 9L44
- CSA Code LR 86146
- FM Cert: FM09ATEX0073U
- Class 1, Div. 1 & 2, Groups B, C, D
- Class 1, Zone 1 & 2, IIB + H2
- Class 2, Div. 1 & 2, Groups E, F, G, Class 3, Div. 1 & 2
- Enclosure Type 4X (Type 7, & 9 for UL)
- IEC Certified: Ex db IIC Gb, EX tb IIIC Db



CAST-X 3000 WITH EXPLOSION PROOF ATEX CERTIFIED ENCLOSURE – SINGLE TUBE

- ATEX Certified Explosion Proof
- UL Classified 9L44
- CSA Code LR 86146
- FM Cert: FM09ATEX0073U
- Class 1, Div. 1 & 2, Groups B, C, D
- Class 1, Zone 1 & 2, IIB + H2
- Class 2, Div. 1 & 2, Groups E, F, G, Class 3, Div. 1 & 2
- Enclosure Type 4X (Type 7, & 9 for UL)
- IEC Certified: Ex db IIC Gb, EX tb IIIC Db





- UL 50, 50E Listed; Type 4, 12, 13; File No. E27525
- cUL Listed per CSA C22.2 No. 94; Type 4, 12, 13; File No. E27525
- UL 508A Listed; Type 4, 12, 13; File No. E61997
- cUL Listed per CSA C22.2 No. 94; Type 4, 12, 13; File No. E61997
- NEMA/EEMAC Type 4, 12, 13
- CSA, File No. 42184: Type 4, 12
- IEC 60529, IP66



- UL 50, 50E Listed; Type 4, 12, 13; File No. E27525
- cUL Listed per CSA C22.2 No. 94; Type 4, 12, 13; File No. E27525
- UL 508A Listed; Type 4, 12, 13; File No. E61997
- cUL Listed per CSA C22.2 No. 94; Type 4, 12, 13; File No. E61997
- NEMA/EEMAC Type 4, 12, 13
- CSA, File No. 42184: Type 4, 12
- IEC 60529, IP66



CAST-X 4000 WITH EXPLOSION PROOF ATEX CERTIFIED ENCLOSURE – DUAL TUBE

- ATEX Certified Explosion Proof
- UL Classified 9L44
- CSA Code LR 86146
- FM Cert: FM09ATEX0073U
- Class 1, Div. 1 & 2, Groups B, C, D
- Class 1, Zone 1 & 2, IIB + H2
- Class 2, Div. 1 & 2, Groups E, F, G, Class 3, Div. 1 & 2
- Enclosure Type 4X (Type 7, & 9 for UL)
- IEC Certified: Ex db IIC Gb, EX tb IIIC Db



CAST-X 4000 WITH EXPLOSION PROOF ATEX CERTIFIED ENCLOSURE – SINGLE TUBE

- ATEX Certified Explosion Proof
- UL Classified 9L44
- CSA Code LR 86146
- FM Cert: FM09ATEX0073U
- Class 1, Div. 1 & 2, Groups B, C, D
- Class 1, Zone 1 & 2, IIB + H2
- Class 2, Div. 1 & 2, Groups E, F, G, Class 3, Div. 1 & 2
- Enclosure Type 4X (Type 7, & 9 for UL)
- IEC Certified: Ex db IIC Gb, EX tb IIIC Db



CAST-X 4000 WITH INSULATING JACKET

