

Resistance Temperature Sensors

Product	Description	Temperature		Accuracy	Page
		°F	°C		
RTDs	Accurate, repeatable and interchangeable over a wide operating range.	-328 to 1200	-200 to 650	DIN Class A ± 0.06% at 32°F (0°C) DIN Class B ±0.12% at 32°F (0°C)	76
Thermistors	Highly sensitive to small changes in temperature, fairly accurate over a limited temperature range.	-75 to 500	-60 to 260	±1% at 77°F (25°C) to ±15% at 32°F (0°C)	88
ENVIROSEAL™ HD	Suited for heavy-duty applications including those in harsh environments.	-40 to 392	-40 to 200	Available with either RTD or thermistors. See information above.	95




Resistance Temperature Sensors









RTDs

Bends

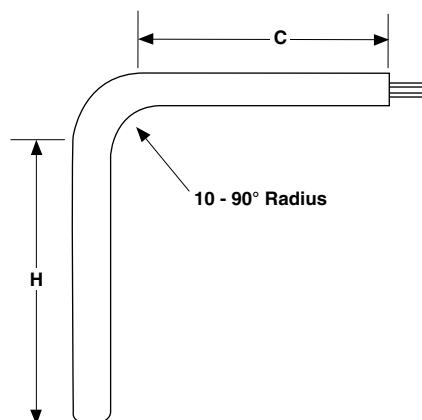Diameter in.	Standard Bend Radius in.	Minimum "H" Dimension in.	Minimum "C" Dimension in.
0.125	3/8	2	2
0.188	3/8	2	2
0.250	1/2	2	2



Lead Terminations

Termination	Code	Length
 Standard Male Plug	A	—
 Standard Female Jack	B	—
 Standard Male Plug with Mating Connector	C	—
 Miniature Male Plug	J	—
 Miniature Female Jack	K	—
 Miniature Male Plug with Mating Connector	L	—
 Split Leads	T	1 1/2*
 #8 Spade Lugs	U	1 1/2*

* When style contains jacketed wire.

Resistance Temperature Sensors





RTDs

Fitting Options

Fixed Fittings

Fitting Type	Material	Sheath Size in.	NPT Thread Size in.	Hex Size in.	Length in.	Code
 Fixed Single Thread 1/8 NPT Customer Specified	303 SS	0.063 to 0.250	1/8	7/16	11/16	A
 Fixed Single Thread 1/4 NPT Customer Specified	303 SS	0.125 to 0.250	1/4	9/16	7/8	B
 Fixed Single Thread 1/2 NPT Customer Specified	303 SS	0.125 to 0.250	1/2	7/8	1	D
 Fixed Double Thread 1/2 NPT Customer Specified	303 SS	0.125 to 0.250	1/2	7/8	1 3/4	F

Compression Fittings

Fitting Type	Material	Sheath Size in.	NPT Thread Size in.	Hex Size in.	Length in.	Code
 Non-Adjustable Compression Brass	Brass	0.125	1/8	1/2	1	J
		0.188	1/8	1/2	1 1/8	J
		0.250	1/8	1/2	1 3/16	J
 Non-Adjustable Compression SS	303 SS	0.063	1/8	1/2	1 1/4	L
		0.125	1/8	1/2	1 1/4	L
		0.188	1/8	1/2	1 5/16	L
		0.250	1/8	1/2	1 5/16	L
 Adjustable Compression TFE Gland	303 SS	0.063	1/8	1/2	1 1/4	G
		0.125	1/8	1/2	1 1/4	G
		0.188	1/8	1/2	1 1/4	G
		0.250	1/4	7/8	2 7/16	X
 Adjustable Compression Lava Gland	303 SS	0.063	1/8	1/2	1 1/4	Q
		0.125	1/8	1/2	1 1/4	Q
		0.188	1/8	1/2	1 1/4	Q
		0.250	1/4	7/8	2 7/16	V


Compression Fittings: Compression fittings are shipped finger-tight on the sheath allowing field installation. Once non-adjustable fittings are deformed, they cannot be relocated. Adjustable fittings come with Tetrafluorethylene (TFE) sealant or lava sealant glands.

Resistance Temperature Sensors

RTDs

Fitting Options (Continued)

Adjustable Spring Loaded

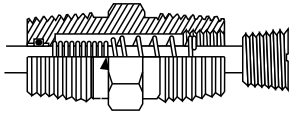Fitting Type	Material	Sheath Size in.	NPT Thread Size in.	Hex Size in.	Length in.	Code
	316 SS	0.250	1/2	7/8	2	H

Bayonet Lockcap and Spring

Fitting Type	Material	Sheath Size in.	Length in.	Code
	Plated Steel	0.125	1 ⁵ / ₈	W
	Plated Steel	0.188	1 ⁵ / ₈	W

Resistance Temperature Sensors

RTDs

Watlow manufactures a variety of RTD sensors that are specially designed to ensure precise and repeatable temperature measurement. Watlow sensors are built to meet the most demanding industrial applications while providing a lower total cost of ownership for our customers.

Performance Capabilities

- Precise and stable within the wide temperature range of -328 to 1200°F (-200 to 650°C)

Features and Benefits

Strain-free construction

- Provides dependable, accurate readings
- Allows elements from different lots to be substituted with no recalibration needed


High signal-to-noise output

- Increases accuracy of data transmission
- Permits greater distances between sensor and measuring equipment

Temperature coefficient (alpha) carefully controlled while insulation resistance values exceed

DIN-IEC-751 standards

- Ensures sensor sensitivity
- Minimizes self heating
- Allows precise measurement
- Repeatable

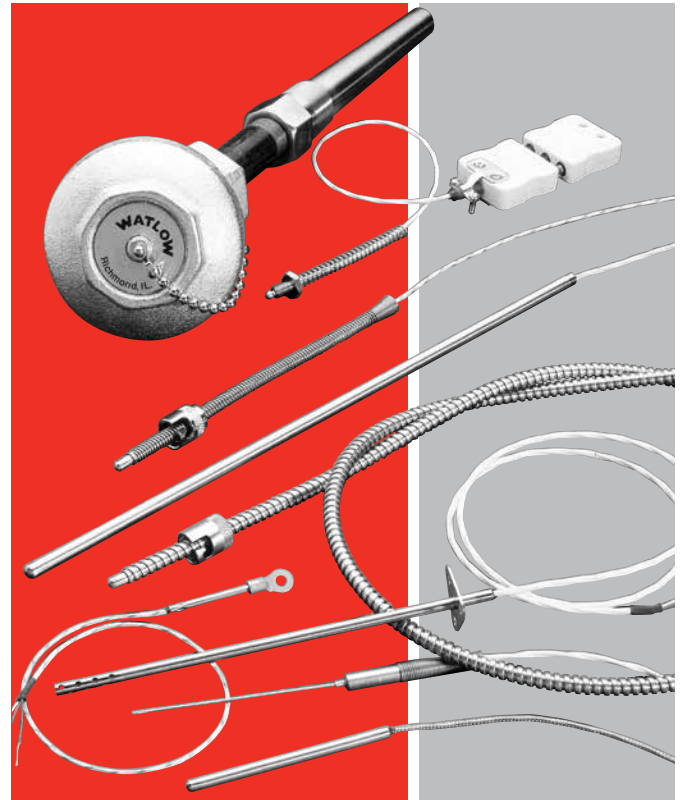


Typical Applications

- Stoves, grills, fryers and other food equipment
- Textile production
- Plastics processing
- Petrochemical processing
- Air, gas and liquid temperature measurement
- Exhaust gas temperature measurement
- Semiconductor processing
- Bearing and gear boxes

Resistance Temperature Sensors

RTDs

Standard Industrial Insulated Leads Style RB

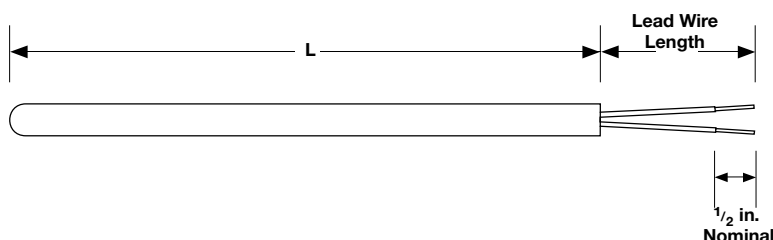

Ordering Information

Part Number

① ②	③	④	⑤	⑥	⑦	⑧ ⑨	⑩	⑪	⑫	⑬ ⑭	⑮
	Sheath O.D. (in.)	Lead Wire Const.	Fittings	Lead Wire Term.	Sheath Const.	Sheath Length "L" (in.)	Sheath Length "L" (fract. in.)	Element	Initial Element Accuracy	Lead Wire Length (ft)	
RB					A						0

③	Sheath O.D. (in.)
G =	0.125
H =	0.188
J =	0.250
Note: 0.125 dia. supplied with 28 gauge wire. 0.188 and 0.250 dia. supplied with 24 gauge wire.	

④	Lead Wire Construction*		
	Standard	Overbraid	Flex Armor
Fiberglass stranded	A	J*	R*
PFA stranded	B	L*	T*
Certain option combinations must be furnished with a transition between the sheath and lead wire. Contact the factory if a transition is unacceptable.			
*May require a transition.			

⑤	Fittings
If required, enter the order code from pages 76 to 77. If none enter "0".	

⑥	Lead Wire Termination
A* =	Standard male plug 400°F (200°C)
B* =	Standard female jack
C* =	Standard plug with mating connector
J* =	Male miniature plug
K* =	Female miniature jack
L* =	Male/female mini set
T =	Standard leads
U =	Leads with spade lugs
* Requires two-or three-wire, single element only.	

⑦	Sheath Construction
A =	316/316L SS

⑧ ⑨	Sheath Length "L" (in.)
Available lengths: 02 to 36	

⑩	Sheath Length "L" (fractional in.)
0 =	No fraction, whole inches
4 =	1/2 in.

⑪	Element		
	2-Wire	3-Wire	4-Wire
100Ω single	A	B	C
100Ω dual*	D	E	—
1000Ω single	J	K	L
* Available in 0.250 inch diameter only.			

⑫	Initial Element Accuracy @ 0°C
A =	DIN Class A (±0.06%)
B =	DIN Class B (±0.12%)

⑬ ⑭	Lead Wire Length (ft)
Whole feet: 01 to 99	
Note: Single wires for 4 feet and under. Duplex wires for over 4 feet.	

Note: Applies to low temperature RTD's only.

Features and Benefits

High accuracy

- Dependable readings

Customized diameters

- From 0.125 to 0.250 inch

Epoxy sealed

- Resists moisture and pull out
- Standard 500°F (260°C) potting

Durable rigid sheath

- 316 stainless steel -58 to 500°F (-50 to 260°C)


Internal heat transfer paste

- Quick time response

Resistance Temperature Sensors

RTDs

Plug or Jack Termination Style RC



Ordering Information

Part Number

① ②	③	④	⑤	⑥	⑦	⑧ ⑨	⑩	⑪	⑫	⑬ ⑭	⑮
RC	Sheath O.D. (in.)	Cold End Term.	Fittings		Sheath Const.	Sheath Length "L" (in.)	Sheath Length "L" (fract. in.)	Element	Initial Element Accuracy		
				0	A					00	0

③ Sheath O.D. (in.)	
G =	0.125
H =	0.188
J =	0.250
Note: 0.125 dia. supplied with 28 gauge wire. 0.188 and 0.250 dia. supplied with 24 gauge wire.	

④ Cold End Termination	
A =	Standard plug
C =	Standard plug with mating connector
Note: Standard plugs and jacks 400°F (200°C).	

⑤ Fittings	
If required, enter the order code from pages 76 to 77. If none enter "0".	

⑦ Sheath Construction	
A =	316/316L SS

⑧ ⑨ Sheath Length "L" (in.)	
Whole inches: 02 to 36	

⑩ Sheath Length "L" (fractional in.)	
0 =	No fraction, whole inches
4 =	1/2 in.

⑪ Element		
	2-Wire	3-Wire
100Ω single	A	B
1000Ω single	J	K

⑫ Initial Element Accuracy @ 0°C	
A =	DIN Class A (±0.06%)
B =	DIN Class B (±0.12%)

Features and Benefits

Durable rigid sheath

- 316 SS -58 to 500°F (-50 to 260°C)

Durable connectors with copper pins

- 400°F (200°C) temperature rating
- Provides simple connection to extension leads

Brazed adapter

- Provides superior connector attachment


High accuracy

- Ensures dependable readings

Resistance Temperature Sensors

RTDs

Metal Transitions Style RF



Ordering Information

Part Number

① ②	③	④	⑤	⑥	⑦	⑧ ⑨	⑩	⑪	⑫	⑬ ⑭	⑮
RF	Sheath O.D. (in.)	Lead Wire Const.	Fittings	Lead Wire Term.	Sheath Const.	Sheath Length "L" (in.)	Sheath Length "L" (fract. in.)	Element	Initial Element Accuracy	Lead Wire Length (ft)	
RF											0

③	Sheath O.D. (in.)
G =	0.125
H =	0.188
J =	0.250
Note: All sheath diameters, MI cable only (high temp) are 24 gauge duplex lead wire.	

④	Lead Wire Construction		
	Standard	Overbraid	Flex Armor
Fiberglass stranded	A	J	R
PFA stranded	B	L	T

⑤	Fittings
If required, enter the order code from pages 76 to 77. If none enter "0".	

⑥	Lead Wire Termination
A*	Standard male plug
B*	Standard female jack
C*	Standard plug with mating connector
J*	Male miniature plug
K*	Female miniature jack
L*	Male/female mini set
T	Standard leads
U	Leads with spade lugs
* Requires two-or three-wire, single element only.	

⑦	Sheath Construction
K =	316/316L SS mineral insulated

⑧ ⑨	Sheath Length "L" (in.)
Whole inches: 03 to 99, metric lengths and lengths over 99 inches contact factory. Maximum length 165 inches.	

⑩	Sheath Length "L" (fractional in.)
0 =	No fraction, whole inches
4 =	1/2 in.

⑪	Element	
	2-Wire	3-Wire
100Ω single	A	B

⑫	Initial Element Accuracy @ 0°C
A =	DIN Class A (±0.06%)
B =	DIN Class B (±0.12%)

⑬ ⑭	Lead Wire Length (ft)
Whole feet: 01 to 99	

Features and Benefits

Stainless steel transitions filled with 500°F (260°C) epoxy

- Protects sensor from moisture
- Encapsulates connection between wire and cable

Coiled spring strain relief

- Protects lead wire against sharp bends in the transition area

Flexible mineral insulated construction

- Provides a bendable and highly durable sensor

Temperature rating

- -328 to 1200°F (-200 to 650°C)

High accuracy

- Ensures dependable readings



Diameters available

- 0.125 to 0.250 inch O.D.

Resistance Temperature Sensors

RTDs

Connection Head/Optional Transmitter Style RR

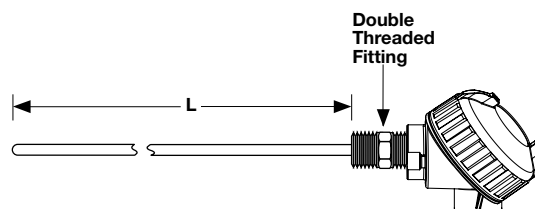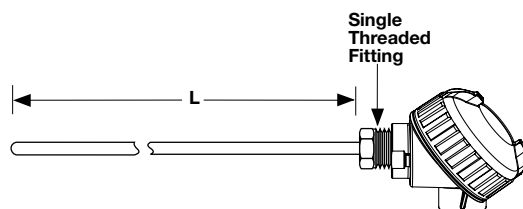

Ordering Information

Part Number

①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩	⑪	⑫	⑬	⑭	⑮
		Sheath O.D. (in.)	Con. Head	Head Mtg. Fittings		Sheath Const.	Sheath Length "L" (in.)		Sheath Length "L" (fract. in.)	Element	Initial Element Accuracy			Tag Style
RR					0							00		

③	Sheath O.D. (in.)
G =	0.125
H =	0.188
J =	0.250
Note: 0.125 dia. supplied with 28 gauge wire. 0.188 and 0.250 dia. supplied with 24 gauge wire.	

④	Connection Head
C =	Polypropylene
D =	Cast iron
E =	Cast aluminum
H =	Explosion proof
U* =	E head with 5750 transmitter
V* =	C head with 5750 transmitter
W* =	H head with 5750 transmitter
* For units with transmitter, the order must specify a range and degree F or C, as well as a temperature span.	

⑤	Head Mounting Fittings
O =	Single threaded, 303 SS
F =	Double threaded, 303 SS 1/2 in. NPT
H* =	Spring loaded, double threaded, 316 SS 1/2 in. NPT
* Available in 0.250 inch diameter only.	

⑦ Sheath Construction		
	-58 to 500°F (-50 to 260°C) 316 SS	-328 to 1200°F (-200 to 650°C) 316 SS
Standard industrial 0.125 - 0.250 in. O.D.)	A	—
Mineral insulated (0.125 - 0.250 in. O.D.)	—	K

⑧ ⑨	Sheath Length "L" (in.)
A =	Sheath construction requires 2 in. min to 36 in. max. length
K =	Sheath construction requires 3 in. min to 99 in. max. length

⑩	Sheath Length "L" (fractional in.)
0 =	No fraction, whole inches
1 =	1/8
2 =	1/4
3 =	3/8
4 =	1/2
5 =	5/8
6 =	3/4
7 =	7/8

⑪ Element			
	2-Wire	3-Wire	4-Wire
100Ω single	A	B	C
100Ω dual * **	D	E	—
1000Ω single **	J	K	L
* Available in 0.250 inch diameter only.			
** Available with standard industrial construction only.			

⑫	Initial Element Accuracy @ 0°C
A =	DIN Class A (±0.06%)
B =	DIN Class B (±0.12%)

⑮	Tag Style
0 =	Polymeric
1 =	300 SERIES SST

Features and Benefits

Connection heads

- Provides superior dust and moisture resistance

Weatherproof plastic heads

- Resists weak acids, organic solvents, alkalies, sunlight and dust

Complete assembly available

- Head-mounted 4-20mA transmitter, three- or four-wire input and non-isolated


Resistance Temperature Sensors

RTDs

For Use With Thermowells Style RT




Type 1

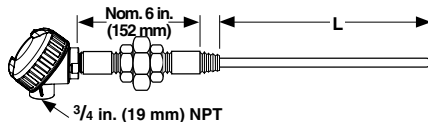


6 inch N-U-N Typical (2 each 1/2 X 3 inch steel pipe nipples and 1 each malleable union)

Type 3

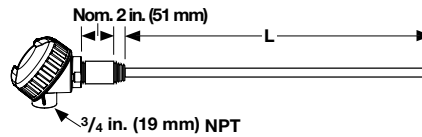

1/2 x 3 inch long steel pipe nipple typical

Type 4



Ordering Information

Part Number

①	②	③	④	⑤	⑥	⑦	⑧ ⑨	⑩	⑪	⑫	⑬	⑭	⑮
		Sheath O.D. (in.)	Conn. Head	Cold End Config.		Sheath Const.	Sheath Length "L" (in.)	Sheath Length "L" (fract. in.)	Element	Initial Element Accuracy		Spring-Loading	Tag Style
RT					0						0		

③	Sheath O.D. (in.)
J =	0.250
Note: Supplied with 24 gauge wire.	

④	Connection Head
C =	Polypropylene
D =	Cast iron
E =	Cast aluminum
H =	Explosion proof
U* =	E head with 5750 transmitter
V* =	C head with 5750 transmitter
W* =	H head with 5750 transmitter
* For units with transmitter, the order must specify a range and degree F or C, as well as a temperature span.	

⑤	Cold End Configuration
1 =	Type 1
3 =	Type 3
4 =	Type 4

⑦ Sheath Construction		
	-58 to 500°F (-50 to 260°C) 316 SS	-328 to 1200°F (-200 to 650°C) 316 SS
Standard industrial (0.125 - 0.250 in. O.D.) (Max. length 36 in.)	A	—
Mineral insulated (0.125 - 0.250 in. O.D.) (Max. length 165 in.)	—	K

⑧ ⑨	Sheath Length "L" (in.) - See Drawings Above
*When ordering a complete assembly with thermowell, specify "AR" as required and reference pages 103 to 107 for "U" dimension; otherwise, specify the "L" dimension in whole inches.	
*Note, maximum sheath length is 36 inches for sheath construction A.	

⑩	Sheath Length "L" (fractional in.)
0 =	No fraction, whole inches
1 =	1/8
2 =	1/4
3 =	3/8
4 =	1/2
5 =	5/8
6 =	3/4
7 =	7/8

⑪	Element		
	2-Wire	3-Wire	4-Wire
100Ω single	A	B	C
100Ω dual*	D	E	—
1000Ω single*	J	K	L
* Available with standard industrial construction only.			

⑫	Initial Element Accuracy @ 0°C
A =	DIN Class A (±0.06%)
B =	DIN Class B (±0.12%)

⑭	Spring -Loading
Y =	Yes
N =	No

⑮	Tag Style
0 =	Polymeric
1 =	300 SERIES SST

Features and Benefits

High quality thermowells and pipe wells

- Protects sensor

Mineral insulated construction

- Available in 0.125 to 0.250 inch O.D.

Available with spring-loading

- Ensures positive contact

Complete assembly available

- Head-mounted 4-20mA transmitter, three- or four-wire input and non-isolated


Variety of connection head options

- Meets your application requirements

Resistance Temperature Sensors

RTDs

For Use With Thermowells
Style RW

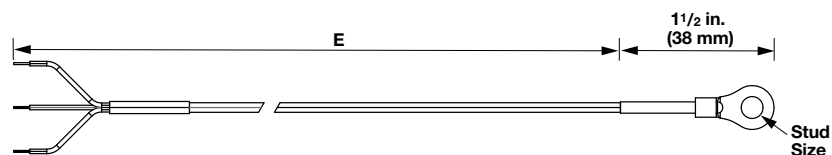

Ordering Information

Part Number

①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩	⑪	⑫	⑬ ⑭	⑮
		Sheath O.D. (in.)	Leadwire Const.		Leadwire Term.	Stud Size - Hole Dia. (inch)				Element	Temp. Coefficient	Leadwire Length "E" (foot)	Special Reqmts.
RW		G		0			0	0	0				0

③	Sheath O.D. (in.)
G =	0.125

④	Leadwire Construction
A =	900°F (500°C) Fiberglass stranded
B =	400°F (200°C) Teflon stranded

⑥	Leadwire Termination
A =	Standard male plug
B =	Standard female plug
C =	Standard plug with mating connector
T =	Standard leads
U =	Leads with spade lugs

⑦	Stud Size - Hole Diameter (inch)
A =	No. 6 - 0.144
B =	No. 8 - 0.169
C =	No. 10 - 0.196
D =	1/4 - 0.266
E =	3/8 - 0.390

⑪ Element		
	2-Wire	3-Wire
100Ω single	A	B

⑫	Temperature Coefficient
	DIN 0.00385
Class A	A
Class B	B

⑬ ⑭	Leadwire Length "E" (foot)
Whole feet:	01-99

⑮	Special Requirements
	If none, enter "0". If required, contact factory.

Features and Benefits

Sensor temperature rating

- -50° to 200°C

High accuracy

- Ensures dependable readings

Washer terminals

- Brazed to a 316 SS tube, 0.125 in. diameter, 1 1/2 in. long.

Sensors placed beneath existing screws or bolts

- Permits surface temperature measurement


Resistance Temperature Sensors

RTDs

Specialty Construction Styles


Adjustable Spring Style

Part Number 10 = 6 in.
Part Number 11 = 12 in.

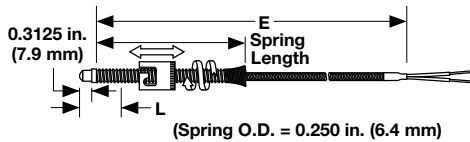


Open Air

Part Number 50

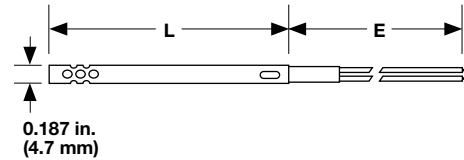


Adjustable Armor Style

Part Number 12

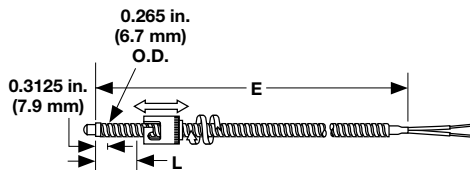


Open Air with Flange

Part Number 55

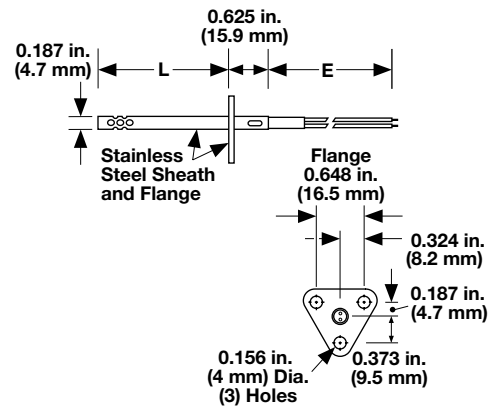


Cartridge with Flange

Part Number 25

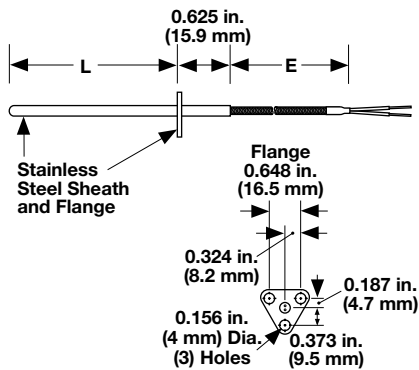

Surface Mount

Part Number 80

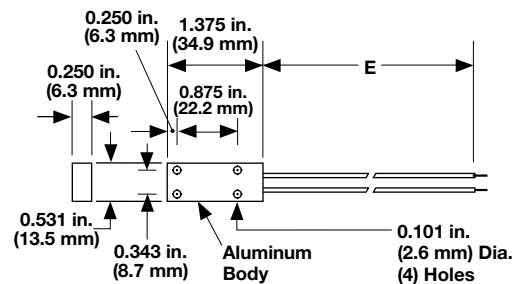

Resistance Temperature Sensors

RTDs

Specialty RTDs



Ordering Information

Part Number

①	② ③	④	⑤	⑥ ⑦	⑧	⑨ ⑩ ⑪	⑫
	Const. Styles	Diameter (in.)	Element Type	Lead Type	Sheath Length "L" (in.)	Lead Wire Length "E" (ft)	Term.
S							

② ③	Construction Styles
10 =	6 inch adjustable spring style
11 =	12 inch adjustable spring style
12 =	Adjustable armor style
25 =	Cartridge with flange
50 =	Open air
55 =	Open air with flange
80 =	Surface mount
Note: See previous page for construction style drawings.	

④	Diameter (in.)
D =	0.188
A =	Not applicable: surface mount

⑤	Element Type
C =	RTD 2-wire, 100Ω DIN 0.00385
D =	RTD 3-wire, 100Ω DIN 0.00385

⑥ ⑦	Lead Type
L4 =	Fiberglass and SS armor
M4 =	Fiberglass
N4 =	Fiberglass and SS overbraid
T2 =	PFA

⑧ Sheath Length “L” (in.)					
A =	Not applicable	K =	5.0 in.	T =	9.0 in.
C* =	1.5 in.	L =	5.5 in.	U =	9.5 in.
D =	2.0 in.	M =	6.0 in.	W =	10 in.
E =	2.5 in.	N =	6.5 in.	Y =	11 in.
F =	3.0 in.	P =	7.0 in.	Z =	12 in.
G =	3.5 in.	Q =	7.5 in.		
H =	4.0 in.	R =	8.0 in.		
J =	4.5 in.	S =	8.5 in.		
* 1.5 required for VAT construction: No. 10, 11, 12)					

Lead Wire Length "E" (ft)			
012 =	1 ft	084 =	7 ft
024 =	2 ft	096 =	8 ft
036 =	3 ft	108 =	9 ft
048 =	4 ft	120 =	10 ft
060 =	5 ft	180 =	15 ft
072 =	6 ft		

⑫	Terminations
A =	1.5 inch stripped split leads, no terminals
B =	No. 8 spade terminals
H =	0.25 in. female quick connect terminals

Specifications

- Two- or three-wire
- Resistance: 100Ω at 0°C
- Alpha curve: 0.00385Ω/Ω/°C
- Tolerance at 0°C: ±0.12%
- Range: -58 to 500°F (-50 to 260°C)